


Compact cylinder

ACQ Series—Longer stroke




Symbol

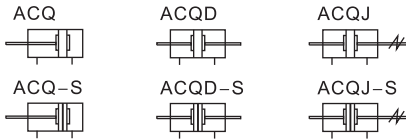

Product feature

- JIS standard is implemented.
- C clip is adopted to connect the cylinder body and back cover or front cover, and riveted structure is adopted to connect piston and piston rod to make it compact and reliable.
- The internal diameter of the body is treated with rolling followed by the treatment of hard anodizing, forming an excellent abrasion resistance and durability.
- The seal of piston adopts heterogeneous two-way seal structure. It has compact dimension and the function of greasel reservation.
- Compact structure can effectively save installation space.
- There are magnetic switch slots around the cylinder body, which is convenient to install inducting switch.
- Installing accessories with various specifications are optional.


Ordering code

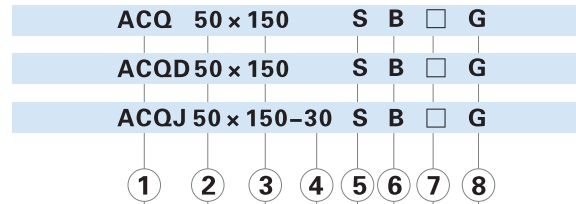

① Model	② Bore size	③ Stroke	④ Adjustable Stroke	⑤ Magnet	⑥ Rod type	⑦ Mounting type [Note1]	⑧ Thread type
ACQ: Compact cylinder (Double acting)	32 40 50 63 80 100	Refer to stroke table for details	No this code	Blank: Without magnet S: With magnet	Blank: Female thread B: Male thread	Blank: No accessories FA: FA type FB: FB type CB: CB type LB: LB type	G: G
ACQD: Compact cylinder (Double rod)						Blank: No accessories FA: FA type FB: FB type LB: LB type	
ACQJ: Compact cylinder (Adjustable stroke)			10 20 30 40 50 75 100				

[Note1] Please refer to page 260~261 for accessory parts.

Inner structure and material of major parts

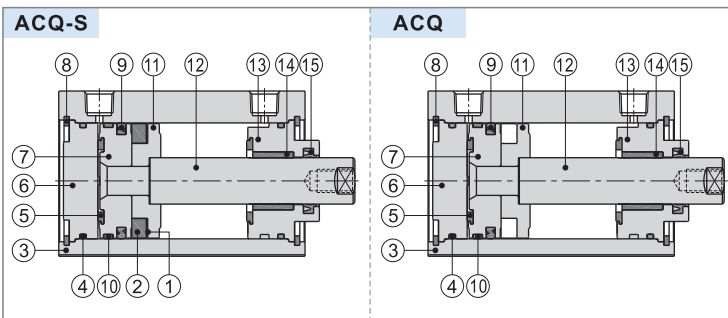

NO.	Item	Material	NO.	Item	Material
1	Magnet washer	NBR	10	Wear ring	No(Φ 32)\Wear resistant material(Others)
2	Magnet	Plastic	11	Magnet holder	Aluminum alloy
3	Body	Aluminum alloy	12	Piston rod	Carbon steel with 20 μ m chrome plated
4	O-ring	NBR	13	Front cover	Aluminum alloy
5	Bumper	NBR	14	Bushing	No(Φ 32)\Wear resistant material(Others)
6	Back cover	Aluminum alloy	15	Front cover packing	NBR
7	Piston	Aluminum alloy			
8	C clip	Spring steel			
9	Piston seal	NBR			




Compact cylinder

ACQ Series—Longer stroke

Dimensions

ACQ


Φ32~Φ100(Stroke > 100)

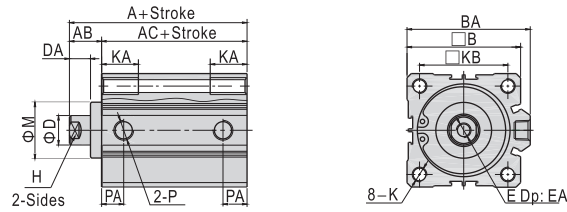

Bore size\Item	A	AB	AC	B	BA	D	DA	E	EA	H	K	KA	KB	M	P	PA
32	62.5	17	45.5	45	49.5	16	12	M8 × 1.25	13	14	M6 × 1.0 Thru.hole: Φ5.2	17	34	22	1/8"	12.5
40	72	17	55	53	57	16	12	M8 × 1.25	13	14	M6 × 1.0 Thru.hole: Φ5.2	17	40	28	1/8"	14
50	73.5	18	55.5	64	71	20	13	M10 × 1.5	15	17	M8 × 1.25 Thru.hole: Φ6.8	22	50	35	1/4"	14
63	75	18	57	77	84	20	13	M10 × 1.5	15	17	M10 × 1.5 Thru.hole: Φ8.5	27	60	35	1/4"	16.5
80	86	20	66	98	104	25	15	M16 × 2.0	21	22	M12 × 1.75 Thru.hole: Φ10.3	32	77	43	3/8"	19
100	97.5	22	75.5	117	123.5	32	17	M20 × 2.5	27	27	M12 × 1.75 Thru.hole: Φ10.3	33	94	59	3/8"	23


ACQD

Φ32~Φ100(Stroke > 100)

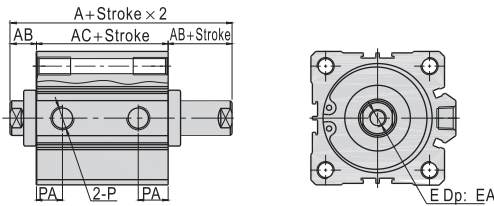

ACQJ


Φ32~Φ100(Stroke > 100)

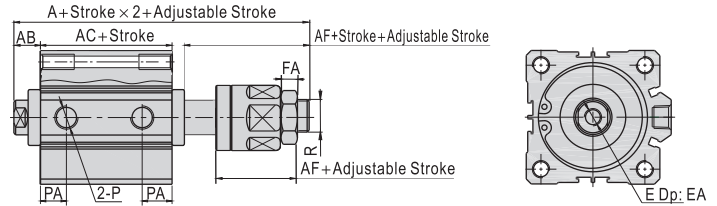

Bore size\Item	A(ACQD)		A(ACQJ)		AB	AC		AF	EA	FA	PA	R
	Without magnet	With magnet	Without magnet	With magnet		Without magnet	With magnet					
32	79.5	89.5	95.5	105.5	17	45.5	55.5	28	13	7	12.5	M12 × 1.25
40	89	99	105	115	17	55	65	28	13	7	14	M12 × 1.25
50	91.5	101.5	107.5	117.5	18	55.5	65.5	29	15	8	14	M16 × 1.5
63	93	103	109	119	18	57	67	29	15	8	16.5	M16 × 1.5
80	106	116	126.5	136.5	20	66	76	35.5	21	10	19	M20 × 1.5
100	119.5	129.5	145	155	22	75.5	85.5	42.5	27	13.5	23	M27 × 2.0

Remark) The unmarked dimension is the same as ACQ standard type.

Male thread (Bore size: Φ32~Φ100 Stroke>100 Longer type)

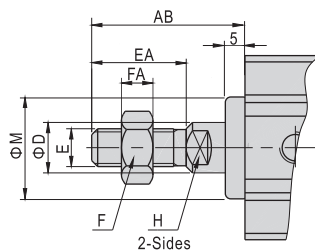

Bore size\Item	AB	D	E	EA	FA	F	H	M
32	38.5	16	M14 × 1.5	23.5	8	19	14	22
40	38.5	16	M14 × 1.5	23.5	8	19	14	28
50	43.5	20	M18 × 1.5	28.5	11	27	17	35
63	43.5	20	M18 × 1.5	28.5	11	27	17	35
80	53.5	25	M22 × 1.5	35.5	13	32	22	43
100	53.5	32	M26 × 1.5	35.5	13	36	27	59